



# ARK LV Battery System

- Flexible capacity options, 2.56kWh to 25.6kWh
- Excellent safety of cobalt free LiFePO4 battery
- Easy installation with modular and stacked design
- Remote firmware upgrade



P O W E R  
- I N G O  
T O M O -  
R R O W O

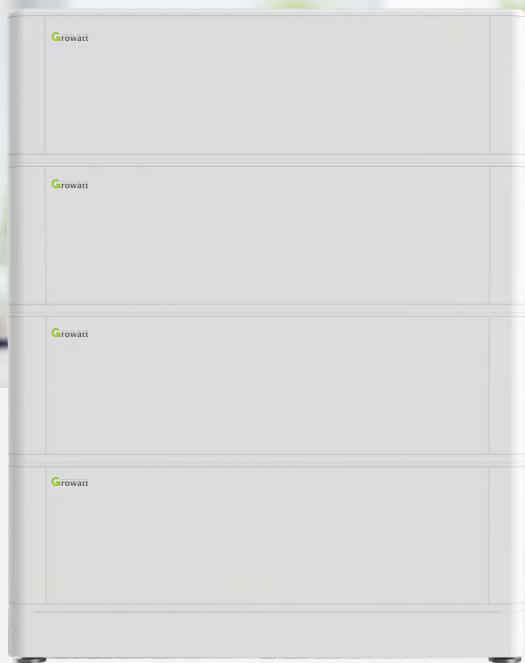

Datasheet	ARK 2.5L	ARK 5.1L	ARK 7.6L	ARK 10.2L	ARK 12.8L	ARK 15.3L	ARK 17.9L	ARK 20.4L	ARK 23.0L	ARK 25.6L
System Demo										
Battery Module	ARK 2.5L-A1 (2.56kWh, 51.2V, 28kg)									
Number of Modules	1	2	3	4	5	6	7	8	9	10
Energy Capacity	2.56kWh	5.12kWh	7.68kWh	10.24kWh	12.8kWh	15.35kWh	17.92kWh	20.48kWh	23.04kWh	25.64kWh
Usable Capacity	2.30kWh	4.6kWh	6.9kWh	9.21kWh	11.52kWh	13.81kWh	16.12kWh	18.43kWh	20.73kWh	23.04kWh
Dimension (W/D/H)	650/260/185mm	650/260/365mm	650/260/545mm	650/260/725mm	650/260/905mm	650/260/1085mm	650/260/1265mm	650/260/1445mm	650/260/1625mm	650/260/1805mm
Weight	28kg	56kg	84kg	112kg	140kg	168kg	196kg	224kg	252kg	280kg
Standard Charge/Discharge Current	25A	50A	75A	100A	100A	100A	100A	100A	100A	100A
<b>General</b>										
Battery Type	Cobalt Free Lithium Iron Phosphate (LFP)									
Nominal Voltage	51.2V									
Operating voltage Range	47.2 - 56.8V									
IP Protection	IP65									
Installation	Wall-mounted or Floor installation* <sup>1</sup>									
Operation Temperature	-10~50°C* <sup>2</sup>									
<b>Features</b>										
BMS Monitoring Parameters	SOC, System voltage, current, cell voltage, cell temperature, PCBA temperature measurement									
Communication Port	CAN									
Warranty: 5 years /10 years	Yes/optional									
<b>Certification</b>										
IEC62619 (Cell&Pack), CE, CEC, RCM, UN38.3										

\*1 Floor installation requires extra base (W/D/H=650/260/80 mm)

\*2 The performance will be limited when the temperature is below 10°C or above 45°C

\* ARK series battery has an EU model and a General model, the storage inverters sold in European countries only work with EU model ARK battery.